


Bliss 13-26-38-50

wall/ceiling

MOODD

Wall or ceiling mounted architectural luminaires for direct and indirect fluorescent lighting.


- support body in extruded anodized natural aluminum
- frontal fascia and side brackets in 1/4" aluminum plate with brushed anodized finish or matte white powder coated finish, chrome plated finish also available for Bliss 13
- upper and lower diffusers in extruded frosted acrylic, in frosted glass for Bliss 13
- 120V electronic ballasts with 277V and dimmable optional
- predisposed for "pig-tail" mounting or single gang/switch electrical junction box mounting
- cover plate supplied for mounting to standard electrical junction boxes

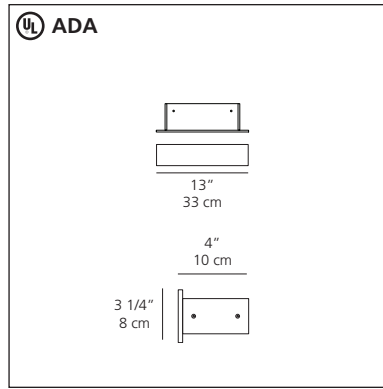

Bliss 13 wall/ceiling

fluorescent source


- 1 x 42W (GX24q-4/T4).....

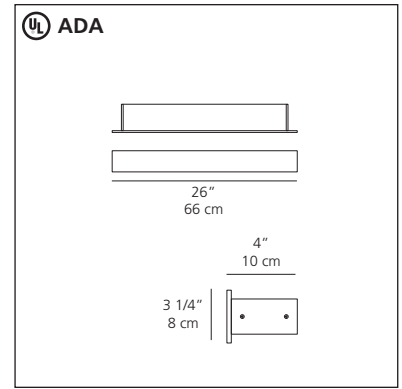

Bliss 26 wall/ceiling

fluorescent source


- 1 x 24W (G5/T5 HO).....

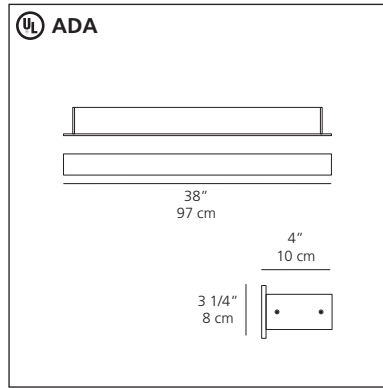

Bliss 38 wall/ceiling

fluorescent source

- 1 x 39W (G5/T5 HO).....

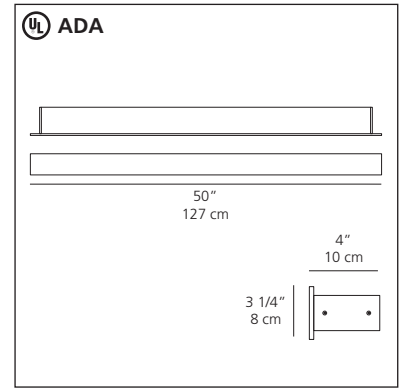

Bliss 50 wall/ceiling

fluorescent source

- 1 x 54W (G5/T5 HO).....

eco design

