


Logico wall
Logico mini wall
Logico micro wall

Michele De Lucchi, Gerald Reichert

Wall mounted luminaires for diffused incandescent or fluorescent lighting for applications with a single diffuser unit or with an assembly of three diffuser units in a horizontal linear configuration.

- diffuser in handblown glass with satined finish
- concealed wall plate support in silver grey lacquered steel
- mounting to standard electrical junction boxes and with provisions for additional wall fastening for the triple configurations
- can be mounted in downwards or upwards position with supplied clip

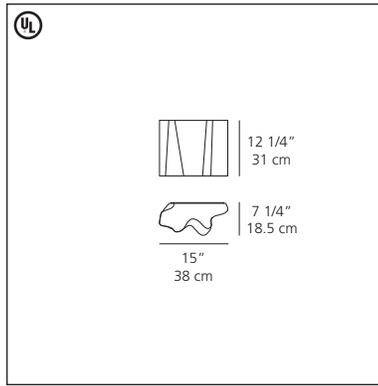

Logico wall single


incandescent source

• 2 x 75W (E26/A19).....

or

fluorescent source

• 2 x 18W (G24q-2/T4).....

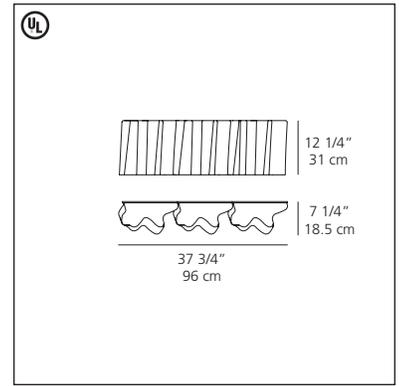

Logico wall triple

incandescent source

• 6 x 75W (E26/A19).....

or

fluorescent source


• 6 x 18W (G24q-2/T4).....

eco♥design



Logico wall single

UL ADA



Logico mini wall single

incandescent source


- 1 x 75W (E26/A19).....

or

fluorescent source

- 2 x 13W (G24q-1/T4).....

UL ADA



Logico mini wall triple

incandescent source

- 3 x 75W (E26/A19).....

or


fluorescent source

- 6 x 13W (G24q-1/T4).....



Logico mini wall triple

UL ADA



Logico micro wall single

incandescent source


- 1 x 60W (E12/G16 1/2).....

or

fluorescent source

- 2 x 13W (G24q-1/T4).....

UL ADA



Logico micro wall triple

incandescent source

- 3 x 60W (E12/G16 1/2).....


or

fluorescent source

- 6 x 13W (G24q-1/T4).....



Logico micro wall single

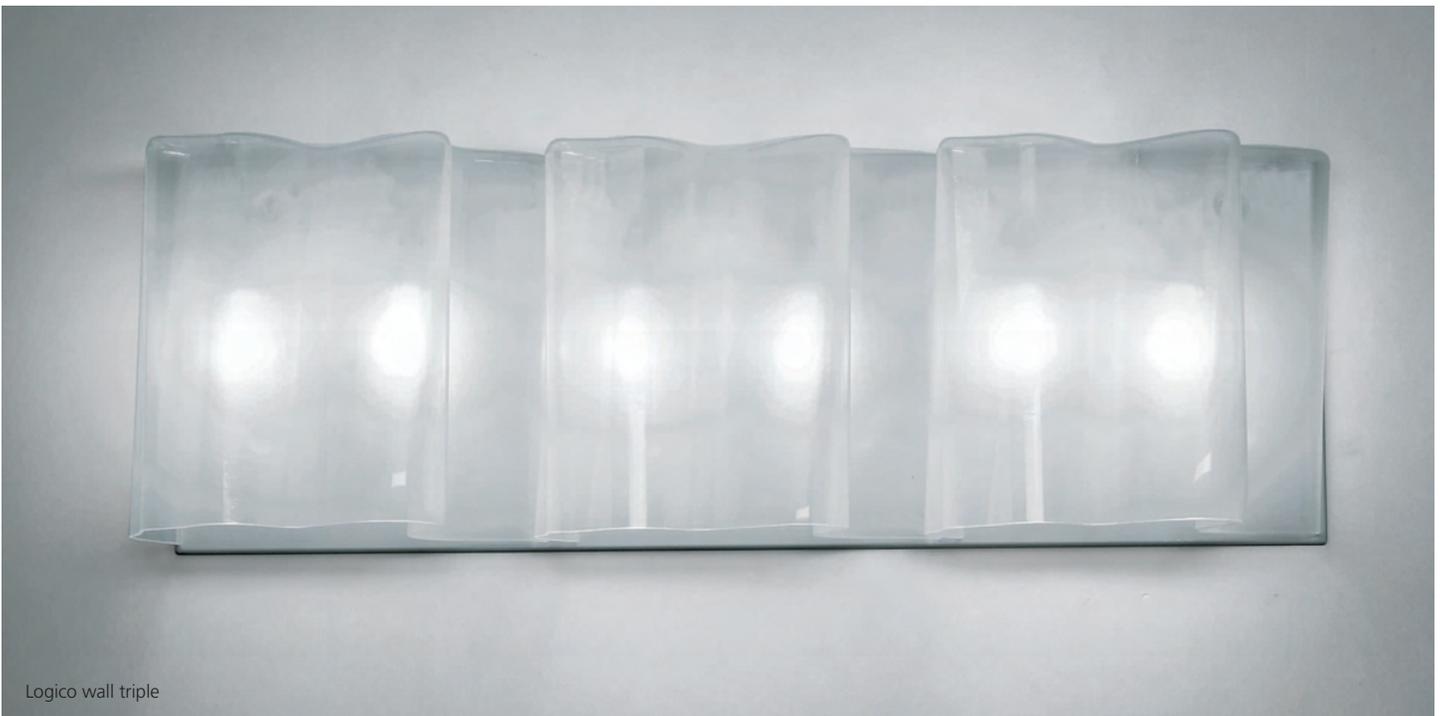

Logico wall triple