


	Finish Color	Blade Span	Blade Color	<b>Light Option</b>	Control Option
#NOU	-	-	-	-	-
	•	•	•	•	•
	MWBS Matte White/Brass	<b>56</b> 56" Span	<b>EB</b> Ebony	<b>NL</b> No Light	WC Wall Control
	MWGT Matte White/Graphite		<b>GY</b> Graywash	<b>271</b> 17W LED	RC Remote Control
	GTMB Graphite/Matte Black		MP Maple		CC Wall/Remote Combo
	DBBS Dark Bronze/Brass		MG Mahogany		
			<b>WW</b> Whitewash		

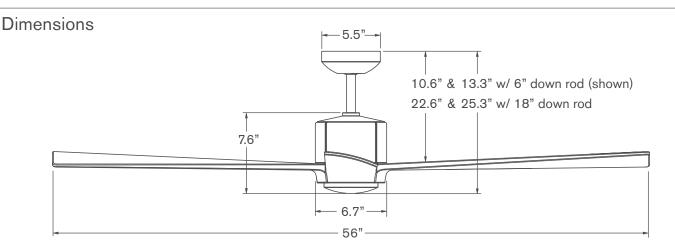

## **Specifications**

- 6-speed, reversible DC motor
- Die cast aluminum construction
- 56" span, solid wood blades
- Includes 6" and 18" down rods (longer options also available)
- Optional LED light: 17W, 90 CRI, 3000K, 1530 lumens (dimmable) behind opal glass diffuser; adds 0.75" to length of fan; CA Title 24, JA8-2019 compliant
- Slope compatible up to 20°; adapter available for slopes up to 45°
- Designed by The Modern Fan Company
- ETL listed for dry and damp locations
- Weight: 13.0 lbs (5.9 kgs)

#### Performance Data

LOWEST SPEED

RPM: 50 CFM: 1,833 Watts: 2.87 CFM/W: 639

HIGHEST SPEED

RPM: 160 CFM: 5,741 Watts: 29.37 CFM/W: 195

### **Energy Guide Data**

Average Energy Use 18 Watts

> Average Airflow 3,909 CFM

Yearly Energy Cost \$5

Average Efficiency 212 CFM/W

Energy Guide Data represents weighted averages of low speed and high speed performance, assuming typical use (excluding light). For more information, visit www.modernfan.com.

## Nouveau DC



#### FAN FINISHES



#### SOLID WOOD BLADES

Solid wood blades are CNC milled from a light-weight and stable, plantation grown Paulownia, then hand-finished as shown here.



#### NOUVEAU DC CONTROLS

Nouveau DC controls use RF transmission to a receiving unit included with each fan, providing six speeds, reversing and light function (on/off or dimming). Control selection is made at time of order and incorporated into fan item number. Controls utilize dedicated (unique) RF channels to avoid interference with other ceiling fans installed nearby. The wall control (if ordered) also includes a master power switch.

## Wall Control (WC) Remote Control (RC) Wall/Remote Combo (CC)







# \* The Nouveau DC must use one of the above control options. Third party fan controls are not compatible with this product. The Remote Control (RC) can be used in combination with a standard power switch (on-off) in wall box.

- \*\* Wall control unit is designed for operation of a single fan/fan light only. For multiple units on a single switch leg, the remote control option can be used if the fans are within suitable range. Contact Modern Fan customer support with questions or for additional guidance.
  - \*\*\* To replace lost or damaged control components or to add secondary control to existing control sets (e.g. to add a handset to an existing wall control system), contact Modern Fan Co. customer support for ordering guidance.

#### DOWN RODS

The Nouveau DC ships standard with 6" and 18" down rods. Use the following part numbers to order accessory down rods.

Finish			Length	
#DRD	-		-	
	•		•	
	MW	Matte White	12	12"
	GT	Graphite	24	24"
	DB	Dark Bronze	36	36"
			48	48"
			60	60"
			72	72"

#### SLOPE ADAPTER

The Nouveau DC will accommodate ceiling slopes up to 20 degrees. The #045 slope adapter can accommodate slopes exceeding 20 degrees and up to 45 degrees.

#### **Finish**

**A** 

#045

MW Matte White

**GT** Graphite

**DB** Dark Bronze