



**Weblink**  
104

**Project page**  
264, 340

Biogen IDEC, San Diego, California, USA. Architect: Hellmuth, Obata + Kassabaum, Inc. Lighting Designer: Lighting Design Alliance. Photo: Scott McDonald of Hedrich Blessing

**Design**  
Vilhelm Wohlert

**Concept**  
Wohlert Pendant provides uniform general diffuse illumination. The opening at the bottom of the glass produces direct light. The quality of the glass ensures that the visual appearance of the Wohlert Pendant has an evenly lit surface.


**Finish**  
White opal glass.

**Material**  
Shade: Handblown white opal glass. Pendant stem: Brushed steel.

**Mounting**  
Canopy: White. Cord type: 3 or 5-conductor, 18 AWG white PVC power cord. Cord length: 12'.

**Weight**  
Max. 8 lbs.

**Label**  
cUL, Dry location. IBEW.

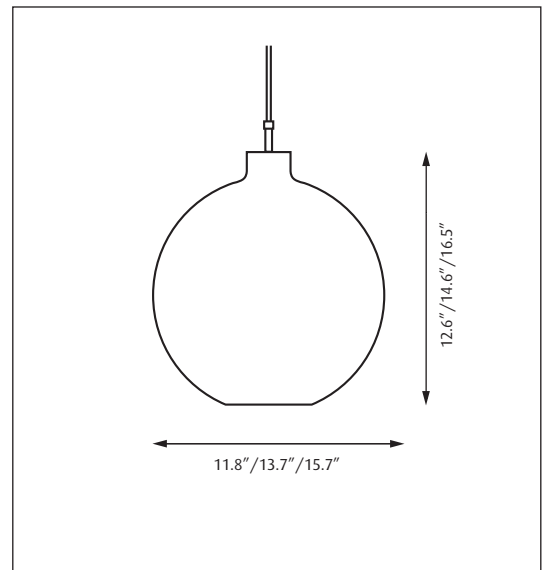

Product code	Dimension	Light source	Voltage	Finish
WOP	11.8" 13.7" 15.7"	1/26W/32W/42W/CF GX24q-3/4 1/200W/A-23/IF medium	120-277V 120V	GLASS

Specification notes:  
a. CF variants provided with universal wattage socket and one 120-277V electronic ballast in the canopy.  
b. Incandescent variants only available in 120V.

Info notes:  
I. The comparable EU version has the following classification: Ingress Protection Code: IP20.

